Pelsan

IP40 Endirekt Steril ATH* Armatürler

IP40 Indirect Sterile Luminaires

Teknik Çizim
Technical Drawing

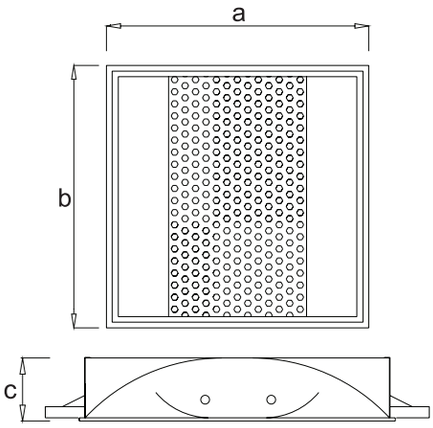

Işık Şiddeti Dağılım Eğrisi
Light Distribution Curve

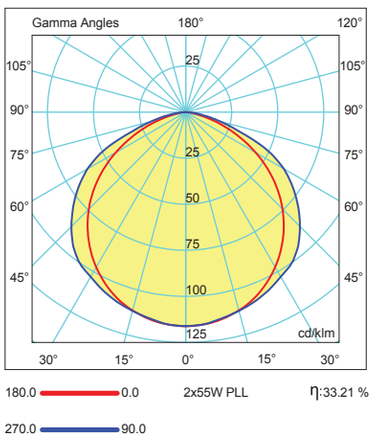

Mekanik Özellikler
Elektrostatik toz boya kaplı, 0,50 mm kalınlığında metal gövde. Isı değişimine ve çevre şartlarına uygun EPDM conta. Taş yünü tavan için uygun olan armatürde, alçıpan tavan montajı için de 4 adet braket ve vida.

Optik Özellikler
Optimum yayılma sağlayan ve zamanla sararma yapmayan elektrostatik toz boya kaplı metal reflektör. Özel delikli perfore içerisine yerleştirilmiş opal film. Endirekt ışık dağılımı. Yüksek ışık geçirgenliğine sahip PMMA optik kapak

Elektriksel Özellikler
A2 sınıfı, düşük güç kayıplı, ömrü 50.000 saatin üzerinde olan elektronik balast. Minimum 50.000 açma kapamaya uygun olan sıcak ateşleme özellikli balast ile uzun lamba ömrü. Şebeke gerilimindeki dalgalanmalardan etkilenmeyen ve sabit ışık sağlayan etkin güç faktörü düzeltmesi. "Halojen free" iç teçhizat kabloları. 2,5mm² kesitli kablo montajına uygun yanmaz çıkış klemensi.

Opsiyonlar
DALI ve koridor fonksiyon uygulaması. B2 sınıfı manyetik balast uygulaması. 3 saate kadar acil durum aydınlatma ünitesi uygulaması. Metal asma tavan uygulaması. PLL, T5 ve T8 lamba uygulaması

***Asma Tavan Hastane Armatürü**

Mechanical Specifications
0,50 mm thick metal frame with electrostatic powder coating. Stainless steel latches positioned to prevent falling of the framework. Ceiling tile compatible model including 4 extra brackets and screws for drywall ceiling installations

Optical Specifications
Electrostatic powder coated non-yellowing metallic reflector providing optimum diffusion. Specially perforated opal film insert. Indirect luminous distribution with anti-glare lamellae. Transparent PMMA Optical diffuser

Electrical Specifications
A2 class, low-loss electronic ballast with over 50.000-hours lifetime. Long lamp lifetime due to hot ignition property of the ballast enabling minimum 50.000 switching cycles. Efficient power factor correction immune to fluctuations in grid voltage and providing constant light output . "Halogen-free" internal wiring. Non-flammable connector terminal suitable for 2,5mm² cross-sectioned cable installation.

Options
DALI and corridor function applications. B2 Class Electromagnetic ballast application. Emergency lighting unit application up to 3 hours.Metal suspended ceiling application. PLL,T5 and T8 Lamp applications

Kullanım Alanları Fields of Application

Armatürlere ait büyüklükler Product Details

Ürün Kodu *Code No*	Güç *Power* (W)	Akım *Current* (A)	Lamba Tipi *Lamp Type*	Işık Akısı *Luminous Flux* (lm)	Güç Faktörü *Power Factor*	Boyutlar *Dimensions* (mm) a b c	(mm)	Ağırlık *Weight* (kg)	Hacim *Volume* (m³)	Duy *Base*	Koli Adedi *Pcs/Pack*	Ral Kodu *Ral Code*	Balast Tipi *Ballast Type*
5014 8582	2x24	0.23	TL5	2x1750	>0.95	595x595x120	575x575	17.4	0.1612	G5	3	9016	Electronic
5014 7682	2x55	0.52	PL-L	2x4800	>0.95	595x595x120	575x575	17.4	0.1612	2G11	3	9016	Electronic

CE TSE 230V 50-60Hz F IP 40 EN 60598-2-2